

Standard Lath Sections

Aluminium Specification = 6063t6

Polycarbonate Strips to Suit 87mm STD Laths

63.5mm x 2mm x 2050mm
63.5mm x 2mm x 2500mm
63.5mm x 2mm x 3050mm

(Conform to Class One surface spread of flame).

Polycarbonate Strips to Suit 63.5mm STD Laths

= 35mm x 1mm x 2000mm

Punched Patterns available

Punched in Line

Brickbond Punched

Letterbox Slots also available

Coil sizes 50mm STD laths sect 18499

Shutter drop size	Forward coil on 100mm barrel	Reverse coil on 100mm barrel
2500mm drop	250mm	265mm
3000mm drop	280mm	295mm
3500mm drop	305mm	320mm
4000mm drop	330mm	345mm

All above sizes are to be taken as an estimate only !

6.5kgs per square metre solid.

5kgs per square meter. Punched, hole size = 100mm x 25mm

Coil sizes 63.5 mm STD laths section 29596

Shutter drop size	Forward coil on 100mm barrel	Reverse coil on 100mm barrel
2500mm drop	240mm	275mm
3000mm drop	265mm	295mm
3500mm drop	280mm	320mm
4000mm drop	295mm	335mm

All above sizes are to be taken as an estimate only !

6.5kgs per square metre solid.

5.2kgs per square meter. Punched, hole size = 125mm x 25mm

Coil sizes 87 mm STD laths section 20849


Shutter drop size	Forward coil on 100mm barrel	Reverse coil on 100mm barrel
2500mm drop	285mm	325mm
3000mm drop	325mm	350mm
3500mm drop	345mm	370mm
4000mm drop	365mm	395mm

All above sizes are to be taken as an estimate only !

6.5kgs per square metre solid.

5.3kgs per square meter. Punched, hole size = 150mm x 45mm

Wine Glass Bottom Rail
For use with nylon grille links and tubes and links
Section 10496

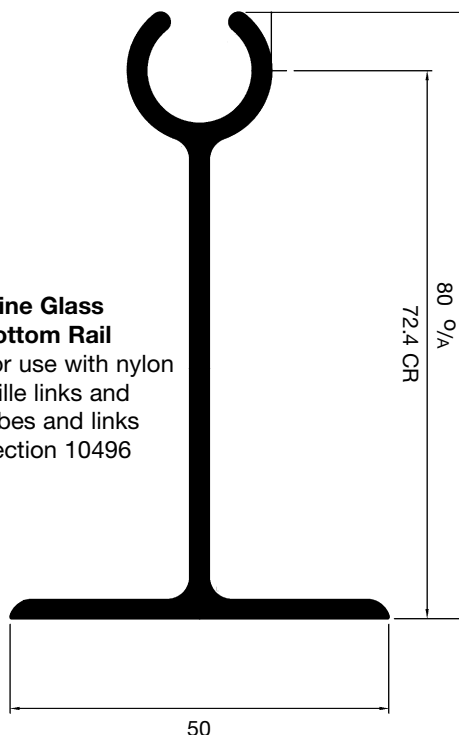

T Bar Bottom Rail
For use with tubes and links
Section 21076

